



PHYSICAL SPECIFICATION

Nominal Voltage	12V	
Nominal Capacity (20HR)	7Ah	
Dimension	Length	151±1mm (5.94 inches)
	Width	65±1mm (2.56 inches)
	Container Height	95±1mm (3.74 inches)
	Total Height	101±1mm (3.98 inches)
Weight	Approx. 2.0 Kg ±3% (4.41 lbs)	
Standard Terminal	Fasten Tab No.187E(F1)	



F1(Fasten Tab No.187E)
Standard Terminal



(in mm)

Shimastu NP series AGM VRLA Batteries have been developed as general purpose batteries, they're valve-regulated lead acid batteries with high quality Absorbed Glass Mat (AGM) separators & high purity raw materials, featured by perfectly good performance and reliable standby service life.

Features:


1. Non-spillable
2. Sealed and Maintenance-free Operation
3. High Quality and High Reliability
4. Less gassing, low Self-discharge
5. Low internal resistance
6. Long design life up to 6 years in float service at 25°C (77 °F)

ELECTRICAL SPECIFICATION

Characteristics

Capacity	20 hour rate (0.35A)	7.0Ah
	10 hour rate (0.658A)	6.6Ah
	5 hour rate (1.19A)	6.0 Ah
	3 hour rate (1.75A)	5.3 Ah
	1 hour rate (3.85A)	3.9Ah
Capacity affected by temperature	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
Max Discharge Current	70A(5 Sec)	
Short Circuit Current	340A	
Internal Resistance	Full charged battery (25°C, 77 °F) 25mΩ	
Constant Voltage Charge	Cycle	Initial Charging Current less than 2.1A Voltage 14.4~15.0V at 25°C (77 °F) Temperature Coefficient -30mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5~13.8V at 25°C (77 °F) Temperature Coefficient -20mV/°C

Discharge curves @ 25°C (77 °F)

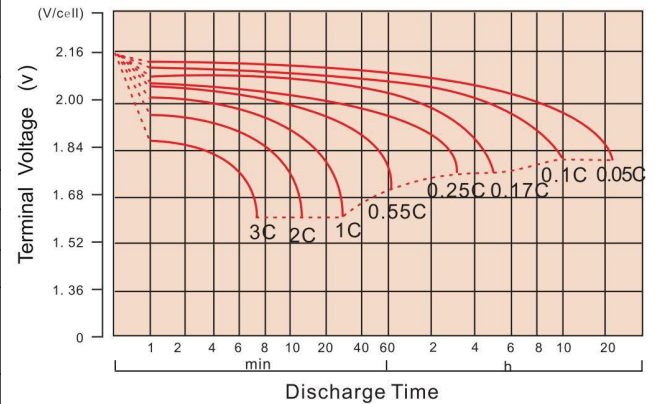

CONSTANT CURRENT DISCHARGE RATING A@25°C

F.V/TIME	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	26.83	18.96	13.71	7.871	4.305	1.982	1.324	0.691	0.365
1.65V	24.95	17.92	13.10	7.556	4.161	1.925	1.292	0.683	0.360
1.70V	22.50	16.49	12.27	7.222	4.004	1.866	1.257	0.676	0.354
1.75V	20.16	15.10	11.42	6.903	3.850	1.808	1.223	0.665	0.350
1.80V	17.71	13.67	10.54	6.598	3.710	1.750	1.190	0.658	0.346

CONSTANT POWER DISCHARGE RATING WATT PER CELL@25°C

F.V/TIME	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	44.47	32.21	23.96	14.30	8.091	3.786	2.552	1.358	0.720
1.65V	41.82	31.06	23.23	13.87	7.863	3.692	2.500	1.346	0.708
1.70V	38.58	29.09	22.09	13.39	7.613	3.596	2.442	1.332	0.699
1.75V	35.35	27.12	20.87	12.93	7.365	3.499	2.383	1.313	0.692
1.80V	31.70	24.98	19.53	12.48	7.139	3.398	2.325	1.298	0.684

Cycle service life




Trickle(or float) service life



Storage time(months)



Temperature and discharge capacity

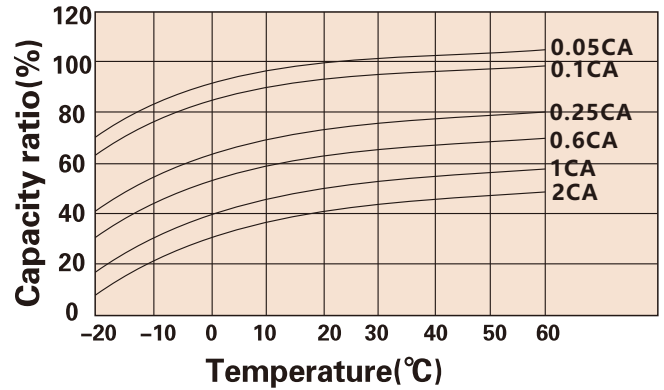

Charging characteristic



Storage Temperature	Supplementary Charge Interval	Charge Method
≤20°C	Every 12 months	Less or 24 hours with a constant voltage of 2.3V/cell
20-30°C	Every 8 months	12-18 hours with a constant voltage of 2.45V/cell
≥30°C	Storage to be avoided	8-12 hours with a constant current of 0.05CA

APPLICATIONS

Standby Usage:

- UPS
- Emergency Lights
- Alarm Systems
- Telecommunication Systems

Cyclic Usage:

- Medical Equipments
- Electric Instruments
- Toys
- Camcorder and Solar Systems

Motive Usage:

- Golf Cars
- Wheelchairs
- Lawnmowers
- Motorcycle

(Note) All above information shall be changed without prior notice, Shimastu reserves the right to explain and update the latest information.