


PHYSICAL SPECIFICATION

Nominal Voltage		12V
Nominal Capacity (10HR)		65Ah
Dimension	Length	350±1mm (13.78 inches)
	Width	167±1mm (6.57 inches)
	Container Height	173±1mm (6.81 inches)
	Total Height	173±1mm (6.81 inches)
Weight		Approx. 22.5Kg ±3% (49.59lbs)
Standard Terminal		Bolt-and-nut terminal Bolt Type: M6

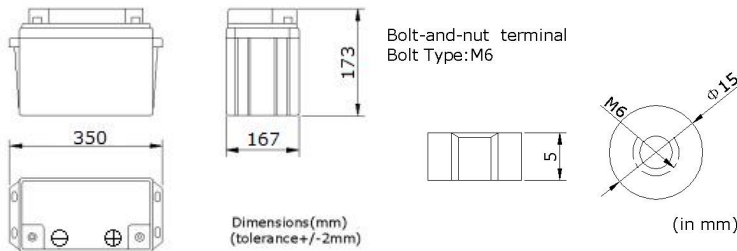

Shimastu NPH series High-Rate Discharge Batteries are suitable for high-power discharge by using strong grids and specially designed active material, it offers 20% more power output than the standard range, suitable for UPS/EPS, data centers where high current loads are required.


Features:

1. Extremely low self-discharge by using high pure material, allowing for a long rest period
2. High quality Adsorbed glass fiber separators, with a gas recombination efficiency of 99%, no need for replenishment with water
3. Long design life up to 10 years in float service at 25°C
4. PbCaSn alloy for plate grids, suitable for high-power discharge

ELECTRICAL SPECIFICATION

Characteristics		
Capacity	15 min wattage @1.67vpc 10 hour rate(6.5A,10.8V) 20 hour rate(3.45A,10.8V)	260W/cell 65.0Ah 69.0Ah
Capacity affected by temperature	40°C (104 °F) 25°C (77 °F) 0°C (32 °F)	102% 100% 85%
Max Discharge Current	715A(5 Sec)	
Short Circuit Current	1640A	
Internal Resistance	Full charged battery (25°C, 77 °F) 5mΩ	
Constant Voltage Charge	Cycle	Initial Charging Current less than 16.2A Voltage 14.1~14.4V at 25°C (77 °F) Temperature Coefficient -30mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5~13.8V at 25°C (77 °F) Temperature Coefficient -20mV/°C

Discharge curves @ 25°C (77 °F)

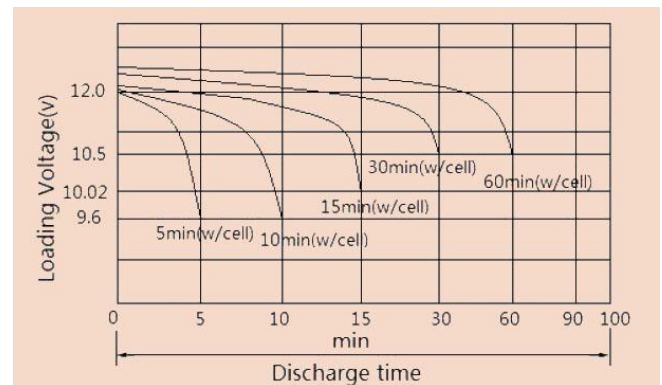

CONSTANT CURRENT DISCHARGE RATING A@25°C

F.V/TIME	3MIN	5MIN	10MIN	15MIN	20MIN	25MIN	30MIN	45MIN	60MIN
1.60V	409.5	322.4	213.2	154.7	128.7	109.3	95.3	70.3	55.4
1.67V	382.2	309.4	200.2	149.5	124.8	107.9	94.0	69.6	54.5
1.70V	367.9	276.9	191.1	146.9	123.5	106.9	93.2	69.2	54.1
1.75V	339.3	253.5	179.4	140.4	119.6	103.5	90.4	67.6	53.4
1.80V	322.4	237.9	162.5	128.7	110.5	94.8	84.6	65.0	51.6


CONSTANT POWER DISCHARGE RATING WATT PER CELL@25°C

F.V/TIME	3MIN	5MIN	10MIN	15MIN	20MIN	25MIN	30MIN	45MIN	60MIN
1.60V	646.1	508.3	357.5	265.2	223.6	193.7	170.3	131.3	99.3
1.67V	605.8	499.2	351.0	260.0	221.0	187.2	166.4	127.0	99.1
1.70V	588.9	460.2	335.4	254.8	215.8	184.6	163.8	125.3	98.8
1.75V	552.5	434.2	312.0	244.4	211.9	183.3	159.9	122.6	96.7
1.80V	526.5	410.8	288.6	230.1	197.6	171.6	153.4	118.8	94.4

Cycle service life




Trickle(or float) service life

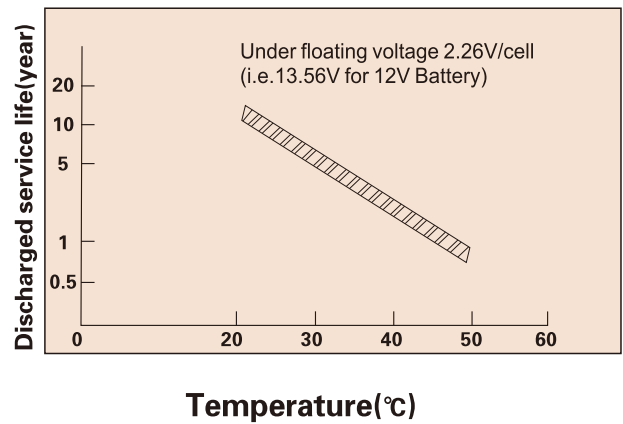

Storage time(months)



Temperature and discharge capacity

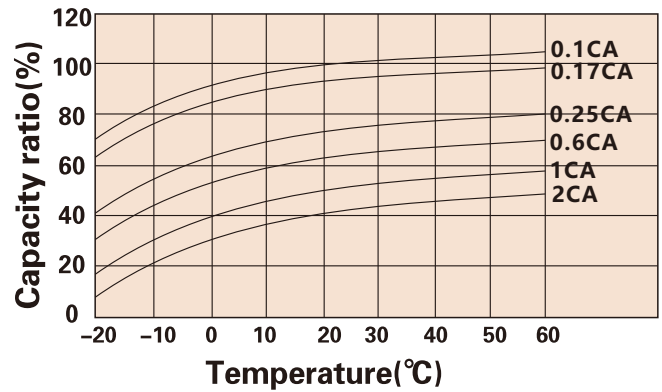

Charging characteristic



Storage Temperature	Supplementary Charge Interval	Charge Method
≤20°C	Every 12 months	Less or 24 hours with a constant voltage of 2.3V/cell
20-30°C	Every 8 months	12-18 hours with a constant voltage of 2.45V/cell
≥30°C	Storage to be avoided	8-12 hours with a constant current of 0.05CA

APPLICATIONS

Standby Usage:

- UPS
- Emergency Lights
- Alarm Systems
- Telecommunication Systems

Cyclic Usage:

- Medical Equipments
- Electric Instruments
- Toys
- Camcorder and Solar Systems

Motive Usage:

- Golf Cars
- Wheelchairs
- Lawnmowers
- Motorcycle

(Note) All above information shall be changed without prior notice, Shimastu reserves the right to explain and update the latest information.